

LUMUX

Project : Type:

Agency :

Distributor :



Description : Wall recessed luminaire with open face trim for low level lighting applications. Architectural illuminating design with low copper die-cast aluminum body and trim. High corrosion resistance powder coat finish. Low iridescence reflector. Available in electronic ballast. Silicone gasket and silicone wires. Clear tempered glass posterior to guard / louver. Vandal resistant stainless steel screws. ETL listed for wet locations and ADA compliant. Standard color is black, specify any RAL colors.

SPECIFICATION:

Housing : Low copper aluminum die cast.
Vandal resistance stainless steel screws.
Silicon gasketed for weather tight operation.


Diffuser : Frosty glass.

Electrical : Voltage : 120 / 277
Lamp: LED

Installation :

Cavity 11.0" x 10.0" x 4.0"
(Length , Width , Depth)

DIMENSIONS:

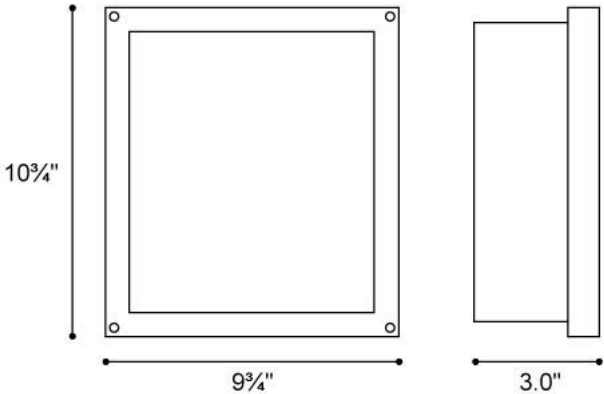

Lumux - LLF888

Lumux reserves the right to modify the above details to reflect changes in the cost of materials and/or design without prior notice.

Lumux Lighting Inc	877-895-5552	Rev : A	Drawing Number LLF888
--------------------	--------------	---------	--------------------------

LUMUX

Date :

Project :

Type:

Agency :

Distributor :

ORDERING GUIDE:


LED :

LLF888/LED color/120-277/Finish

Wattage	Voltage	Lumen	CRI	Temp.	B. Angle	Finish	Option
23	120/277	1340	70	4000K	120	White Black Silver Bronze RAL (optional)	IBP

Lumux - LLF888

Light Distribution pattern :

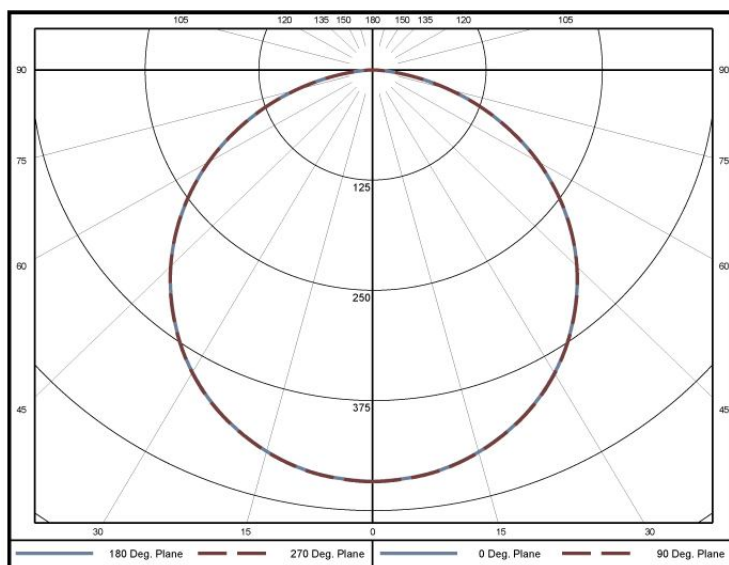

Lumux reserves the right to modify the above details to reflect changes in the cost of materials and/or design without prior notice.

Lumux Lighting Inc

877-895-5552

Rev :F

Drawing Number
LLF888