


LUMUX INC.

INSTALLATION OPERATION INSTRUCTIONS

PREPARING THE FIXTURE

1. **WARNING** - Before starting the installation, disconnect the power by turning off the circuit breaker or removing the fuse at the fuse box. Turning the power off using the light switch is not sufficient to prevent electrical shock.
2. If you are replacing an existing Luminaire, disconnect and remove the old Luminaire. Run the supply wiring through the Luminaire hole and expose them from the Flex -Conduit.
3. Place the Luminaire Housing so the Mounting Brackets (provided) fit into the Wall Opening and secure using the two Fastening Screws (provided) as shown in figure below.
4. Make electrical connections: Connect grounding wire (green or bare copper) from the supply circuit to the connector of the Ballast. Connect the white wire from the supply circuit to the connector of the Ballast. Connect the black wire from the supply circuit to the connector of the Ballast.
6. Replace the Ballast Cover using the four Machine Screw (provided) as shown in figure below .
8. Install the bulb (by others) **Do Not Exceed Recommended Wattage.**
9. Install Luminaire Trim with the four Mounting Screws (provided) as shown in figure below.

IMPORTANT: In order to comply with established electrical code, the installer must seal the area around the Luminaire Canopy and the Wall, with type of caulking compound such as GE 100% or Dow Corning 100% silicone to provide a watertight seal in accordance with the differing surface textures of the wall.

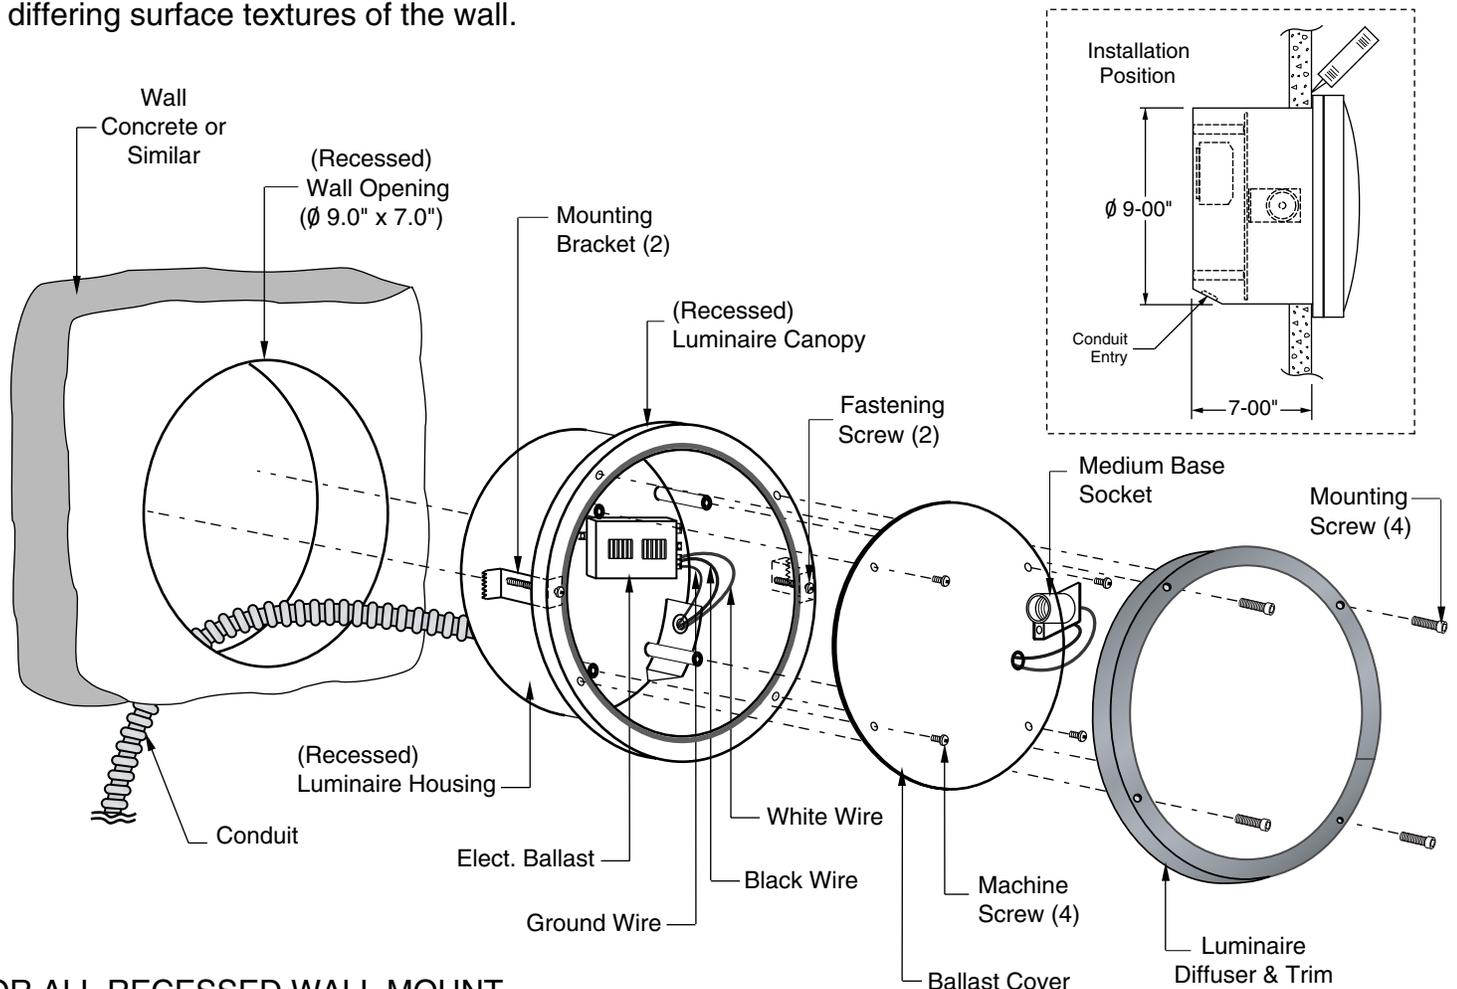

FOR ALL RECESSED WALL MOUNT