
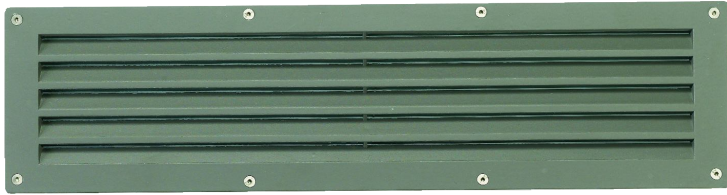


LUMUX

Project :	Type:	Agency :
Distributor :		 Complies with BUY AMERICA



Description : Low copper die cast aluminum housing with angled louvered trim. Vandal resistance stainless steel screws. Silicon gasketed for weather tight operation. ETL listed for wet location. IP65.

SPECIFICATION:


Housing : Low copper aluminum die cast. Vandal resistance stainless steel screws. Silicon gasketed for weather tight operation.

Diffuser : Clear glass.

Electrical : Voltage : 120 / 277
 Lamp: Incandescent T10, Compact Fluorescent, LED CREE.
 Socket : A19, 2G11
 Ballast : Class P, Electronic Ballast

Installation:
 A polymer housing is provided with the unit as a Rough-in-Box. Opening is: 18 3/16" x 4 3/16" x 4.0" (Length, Width, Depth). This box has to get framed in before concrete pour. Otherwise, the weight of the concrete will crush this box.

DIMENSIONS:

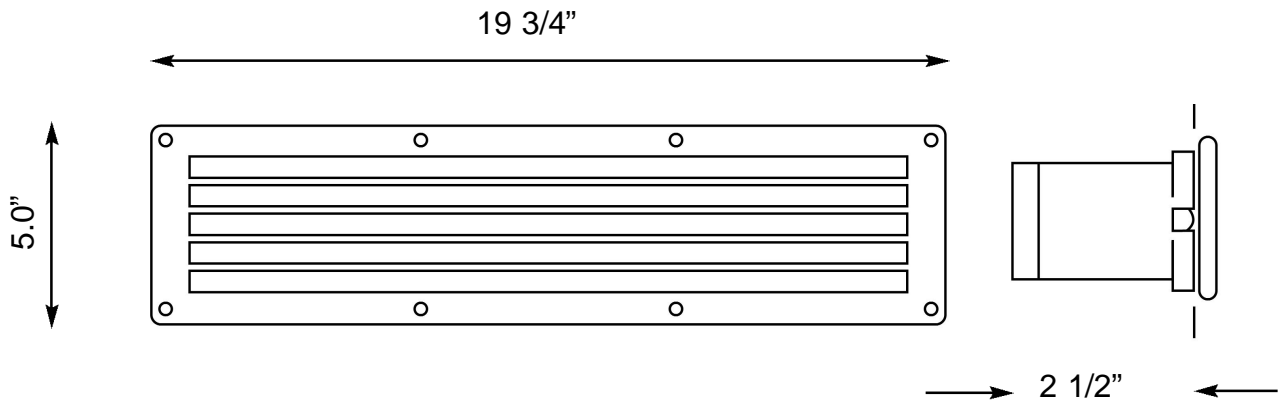

Lumux - SL632L

Lumux reserves the right to modify the above details to reflect changes in the cost of materials and/or design without prior notice.

Lumux Lighting Inc	877-895-5552	Rev :C	Drawing Number SL632L
--------------------	--------------	--------	--------------------------

LUMUX

Date :

Project :

Type:

Agency :

Distributor :

ORDERING GUIDE:

SL632L	Type	Volt	Finish
	T10 CFL,24 watt long(FT24)	120 277	White Black Silver Bronze RAL (optional)
	LED		

LED :


SL632L/LED color/120-277/Finish

Wattage	Voltage	Lumen	CRI	Temp.	B. Angle	Finish
24	120/277	425	70	4000K	120	White
24	120/277	325	70	3000K	120	Black
						Silver
						Bronze
						RAL
						(optional)

Lumux - SL632L

PROJECT NOTES:

Comments

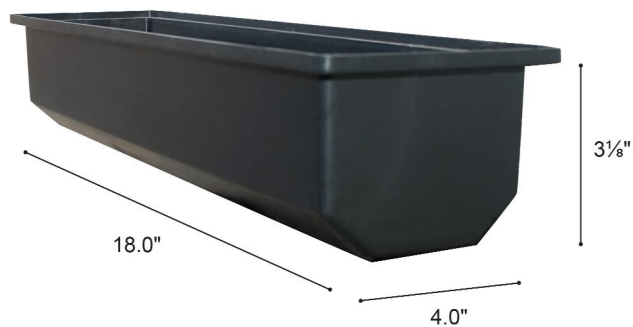

Concrete Pour Box (CPX)

Lumux reserves the right to modify the above details to reflect changes in the cost of materials and/or design without prior notice.

Lumux Lighting Inc	877-895-5552	Rev :B	Drawing Number SL632L
---------------------------	---------------------	---------------	---------------------------------