


INSTALLATION OPERATION INSTRUCTIONS

PREPARING THE FIXTURE

- WARNING** - Before starting the installation, disconnect the power by turning off the circuit breaker or removing the fuse at the fuse box. Turning the power off using the light switch is not sufficient to prevent electrical shock.
- If you are replacing an existing fixture, disconnect and remove the old fixture. Expose the supply wiring from the Outlet-Box.
- Fasten the Mounting Cross-Bar (provided) to the Outlet-Box using the two screws (by others).
- Make electrical connections: Connect grounding wire (green or bare copper) from the supply circuit to the bare copper wire from the Fixture. Connect the white wire(s) from the Fixture to the white wire of the supply circuit. Connect the black wire(s) from the Fixture to the black wire of the supply circuit. Use U.L. Listed wire connectors (by others). Secure wire connectors with U.L. Listed electrical tape (by others).
- Place the Fixture Mounting Base against Mtg. surface allowing the threaded nipple to pass through the hole of the Mtg. Base and fasten using the Mtg. nut (provided) as shown in figure below.
- Install the bulb(s) (by others) **Do Not Exceed Recommended Wattage.**
- Place Fixture Diffuser and Trim against the Mtg. Base; then align the four holes to the Studs and fasten using the four Mounting screws (provided) as shown in figure below.

IMPORTANT: In order to comply with the established electrical code, the installer must seal the area around the Fixture Mtg. Base and the Wall, with type of caulking compound such as GE100% or Dow Corning 100% silicone to provide a watertight seal in accordance with the differing surface texture of the Wall

NOTE: This Fixture is Suitable for Wet Location.

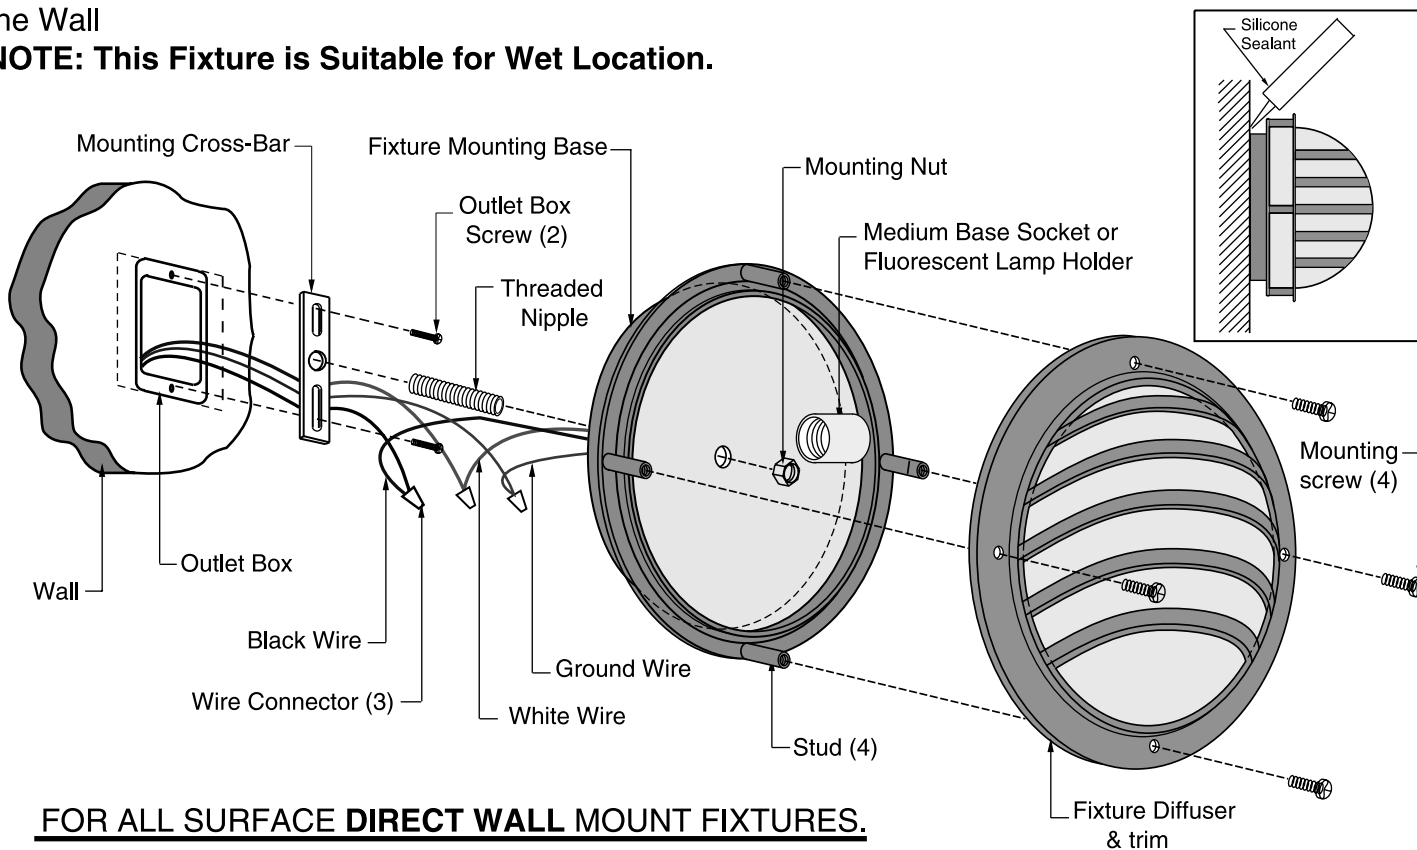

FOR ALL SURFACE DIRECT WALL MOUNT FIXTURES.