

# LUMUX

Project :	Type:
-----------	-------

Agency :
----------

Distributor :
---------------



**Description :** Low copper aluminum die cast, round wall and ceiling luminaries . Vandal resistance stainless steel screws. Fully gasketed for tight weather operation. 1/8" Prismatic glass diffuser. ETL listed for wet locations.

**SPECIFICATION:**


**Housing :** Low copper aluminum die cast. Vandal resistance stainless steel screws. Silicon gasketed for weather tight operation.

**Diffuser :** 1/8" Frosty Prismatic glass

**Electrical :** Voltage : 120 / 277  
 Lamp: Incandescent, Compact Fluorescent, CREE LED  
 Socket : A19, G23-2, G24Q-4.  
 Ballast : Class P, Electronic Ballast

**Installation:** Unit is provided with standard cross bar bracket.

**DIMENSIONS:**

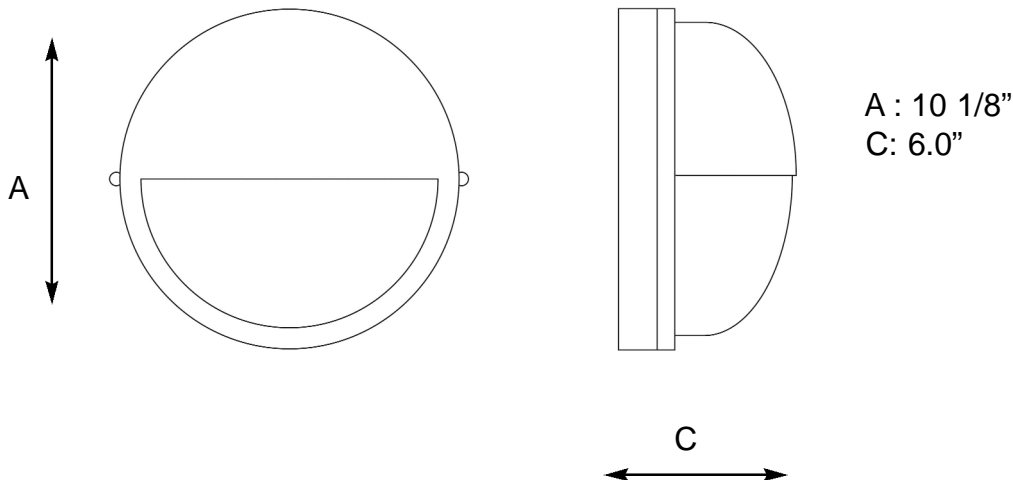

Lumux - L306

Lumux reserves the right to modify the above details to reflect changes in the cost of materials and/or design without prior notice.

Lumux Lighting Inc	877-895-5552	Rev : E	Drawing Number L306
--------------------	--------------	---------	------------------------

# LUMUX

Date :

Project :

Type:

Agency :

Distributor :

## ORDERING GUIDE:

<b>L306</b>	/	<b>Watt</b>	/	<b>Volt</b>	/	<b>Finish</b>	/	<b>Option</b>
		Inc. PL9 PL13 PL18 PI26 PL32 PL42 LED**		120 277		White Black Silver Bronze RAL (optional)		Photo Cell

Lumux - L306

LED CREE 8x3

L306/LED-color/Voltage/Finish

Wattage	Voltage	Lumen	CRI	Temp.	B. Angle	Finish
21	120/277	1154	70	4000K	120	White
21	120/277	1050	70	3000K	120	Black
						Silver
						Bronze
						RAL
						(optional)

## PROJECT NOTES:

Comments

Approval

Lumux reserves the right to modify the above details to reflect changes in the cost of materials and/or design without prior notice.

<b>Lumux Lighting Inc</b>	<b>877-895-5552</b>	<b>Rev :E</b>	<b>Drawing Number</b> L306
---------------------------	---------------------	---------------	-------------------------------