

LUMUX

Date :

Project :

Type:

Agency :

Distributor :



Description : Fabricated from the highest grade of low copper aluminum die cast, with stainless steel screws and tempered frosty glass diffuser. Utilizing silicon O-ring gasket for weather tight operation. High corrosion resistance polyester powder coat finish. Specify these fixtures where low mounting heights illumination is required for steps, marking or tracing of aisles and pathways. Consists of a galvanized steel housing which is recommended for poured concrete construction as a "rough in" housing to form a barrier between the luminaire recessed housing and the concrete. ETL listed for wet locations. ADA compliant. Lamps supplied with luminaires. IP65

SPECIFICATION:


Housing : Low copper aluminum die cast.
Vandal resistance stainless steel screws.
Silicon gasketed for weather tight operation.

Diffuser : Frosty glass.

Electrical : Voltage : 120 or 277
Lamp: Incandescent G4, LED.
Socket : Mini Bi-pin
Ballast : Class P, Electronic Ballast
G4 uses 12 volt transformer (optional).

Installation: Unit comes with its own galvanized steel Rough-In box for dry wall or concrete pour installation. Opening Size : 3.0" x 3.0" x 4 5/8"

DIMENSIONS:

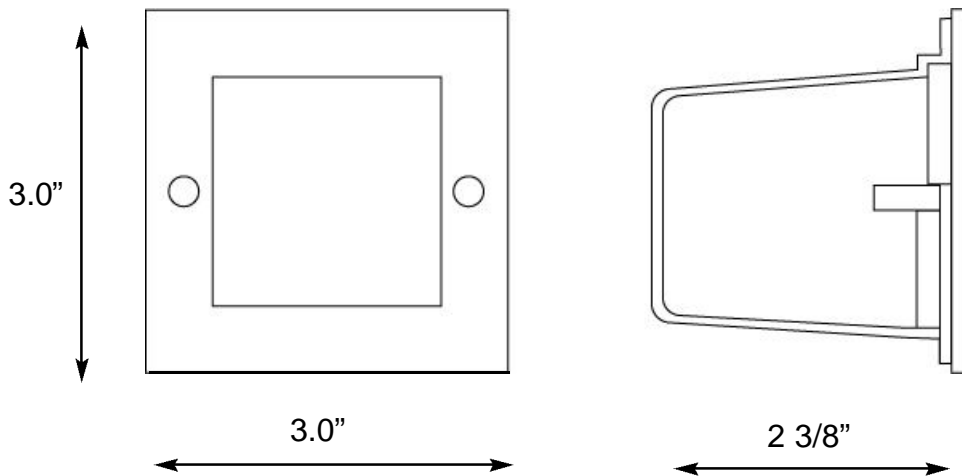

Lumux - SL410SS

Lumux reserves the right to modify the above details to reflect changes in the cost of materials and/or design without prior notice.

Lumux Lighting Inc	877-895-5552	Rev : I	Drawing Number SL410SS
--------------------	--------------	---------	---------------------------

LUMUX

Date :

Project :

Type:

Agency :

Distributor :

ORDERING GUIDE:

SL410SS

/ **Type**

G4(12v)
LED

/ **Volt**

120
277

/ **Finish**

Stainless steel.

LED - 8 Pieces

SL410/LED-color/Voltage/

LED Driver is Integral

Wattage

1.3

Color

Cool White
Warm White
Red
Green
Blue
Amber

Temp


4000
3000

**LED driver is integral 120 or 277.
60 Lumen @ 4000K.**

Lumux - SL410SS

PROJECT NOTES:

Comments

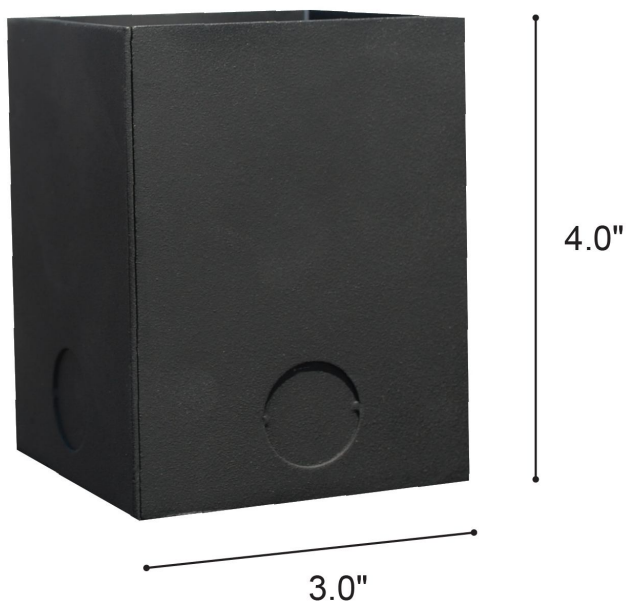

Concrete Pour Box (CPX)

Lumux reserves the right to modify the above details to reflect changes in the cost of materials and/or design without prior notice.

Lumux Lighting Inc

877-895-5552

Rev : I Drawing Number

SL410SS